




# The Next Necessity™



## Dimensions

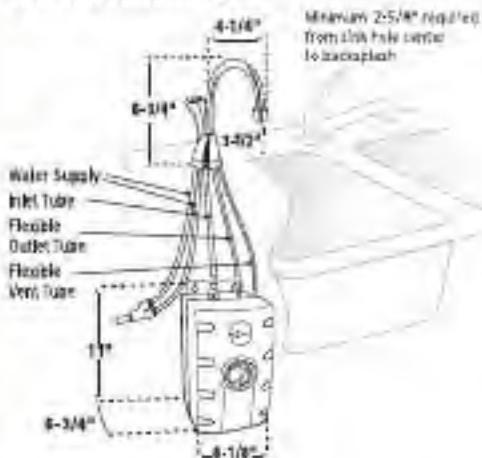

## Job Specifications

## Instant Hot Water Dispensers

### TranScape™ HC-Wave-SS


Graceful, clean, transitional design dispenses instant near-boiling 200°F and cool water

#### Submittal Sheet

- **Hot & Cool** – Dispenses near-boiling 200°F and cool drinking water
- Durable all metal construction
- 35% more near-boiling water from larger 2-3-gallon stainless steel tank
- Easy to adjust temperature control
- Tool-free tank connections and dry start protection to ease installation
- Provides 60 cups/hr of near-boiling water
- Fits countertops up to 3" thick
- 3-Year We Come To You™ In-Home Service Warranty\*
- 120 volts, 750 watts, 6.25 amps
- Available in chrome and satin nickel

#### Specifications

Capacity	2-3-gallon stainless steel tank dispenses 60 cups of 200°F water per hour
Electrical	120 volts A.C., 750 watts, 6.25 amp heating element with grounded three-prong plug
Thermostat	Snap-action, adjustable from 150°F to 210°F (factory pre-set at 200°F)
Irrigation	Meets U.L. 94HF1 flammability specification
Hot Valve	Instant, self-closing
Cold Valve	Instant, self-closing
Recommended Supply Pressure	30-125 psi
Shipping Weight	Approximately 8.5 lbs.
Required Hole Diameter	1-1/2" standard sink hole



#### Sample Specification

Instant hot water dispenser(s) shall be InSinkErator Model HC-Wave-SS with 2-3-gallon stainless steel tank, adjustable temperature from 150°F to 210°F and instant, self-closing hot valve.

#### Warranty:

3-year parts and in-home service.

\*The complete InSinkErator warranty is included in the Care & Use booklet packed with every unit.

US Pat. 6032,481 (tank enclosure).



1-800-558-5700  
[www.insinkerator.com](http://www.insinkerator.com)